

### Description

#### General

The NK3115-60ATO and NK5515-60ATO transceivers from Network Logic are small form factor pluggable modules for serial optical data Communications applications specify of SONET OC-3 / SDH STM-1 / IEEE 802.3u. These modules are designed for single mode fiber with cost effective and high performance by using 1310 nm transmitter/ 1550 nm receiver for NK3115-60ATO and 1550 nm transmitter/ 1310 nm receiver for NK5515-60ATO. It is with the SFP 20-pin connector to allow hot plug capability.



#### Transmitter Section

The transmitter consists of a high-performance 1310 nm or 1550 nm Fabry-Perot (FP) laser in the bi-directional optical subassembly (BOSA), which is housed within a metal package. In addition, this component is also class 1 laser compliant with according to International Safety Standard IEC-825.

#### Receiver Section

The receiver contain of an integrated planar InGaAs PIN photodiode coupled to a high sensitivity trans-impedance amplifier (TIA) in an BOSA. This BOSA combination is mated to a post amplifier IC that provides the post amplification and SD (Signal Detect) indication circuit, which provides LVTTTL logic low state output when an unusable input optical signal level is detected

#### Features

- Single + 3.3 V power Supply.
- Small Form Factor Pluggable MSA Compliant.
- PECL Differential Inputs and Outputs.
- TTL Signal Detect Indicator.
- For Single Mode Applications
- LC Simplex Connector
- EEPROM with serial ID functionality.
- Class 1 Laser International Safety Standard IEC 825 Compliant
- Bi-directional Linking Distance Up to 60 km
- Temperature Ranges: 0°C to +70°C
- RoHS Compliant

#### Applications

- Fast Ethernet Links
- SONET/SDH Equipment Interconnect
- Bridges/Routers/intelligent hub and concentrators

### Performance Specifications

Absolute Maximum Ratings					
Parameter	Symbol	Min	Typ	Max	Unit
Supply Voltage	V <sub>CC</sub>	0	-	5	V
Storage Temperature	T <sub>S</sub>	-40	-	85	°C
Operating Temperature	T <sub>OP</sub>	0	-	70	°C
Lead Soldering Limits	T <sub>SOLD</sub>	-	-	260/10	°C/sec
General Specifications					
Parameter	Symbol	Min	Typ	Max	Units
Data Rate	B	-	155	-	Mbps
Supported Link Length on 9/125μm SMF	L	-	60	-	Km

### Order Information

P/No.	Bit Rate (Mbps)	Distance (km)	Wavelength (nm)	Single/Dual Fiber	Package	TX Power (dBm)	RX Sens. (dBm)
NK3115-60ATO	125 / 155	60	Tx-1310/ Rx-1550	Single	LC SFP	0 to -5	-34
NK5515-60ATO	125 / 155	60	Tx-1550/ Rx-1310	Single	LC SFP	0 to -5	-34

#### BULGARIA

Tel: +359 2 974 3030  
Fax: +359 2 974 0303  
info@networklogic.eu

#### RUSSIA

Tel: +7 495 984 7673  
Fax: +7 495 984 7673  
info@networklogic.ru

#### TAIWAN

Tel: +886 2 2656 0139  
Fax: +886 2 2660 3864  
info@networklogic.com.tw

## Optical and Electrical Characteristics

Transmitter Electrical Characteristics					
Parameter	Symbol	Min	Typ	Max	Unit
Supply Voltage	$V_{CC}$	3.15	3.3	3.45	V
Supply Current	$I_{CC}$	-	-	160	mA
Data Differential Input Voltage	$V_{in, pp}$	300	-	1600	mV
Disable Input Voltage	$V_{IL} - V_{CC}$	-1.81	-	-1.48	V
Enable Input Voltage	$V_{IH} - V_{CC}$	-1.16	-	-0.88	V
Transmitter Optical Characteristics					
Parameter	Symbol	Min	Typ	Max	Unit
Output Optical Power	$P_O$	-5	-	0	dBm
Center Wavelength <b>NK3115-60ATO</b>	$\lambda_C$	1280	1310	1340	nm
Center Wavelength <b>NK5515-60ATO</b>	$\lambda_C$	1530	1550	1570	nm
Spectral Width (RMS) <b>NK3115-60ATO</b>	$\Delta\lambda$	-	2	-	nm
Spectral Width (RMS) <b>NK5515-60ATO</b>	$\Delta\lambda$	-	1	-	nm
Optical Rise Time (10%-90%)	$t_r$	-	-	2	ns
Optical Fall Time (10%-90%)	$t_f$	-	-	2	ns
Extinction Ratio	ER	10	-	-	dB

Receiver Electrical Characteristics					
Parameter	Symbol	Min	Typ	Max	Unit
Supply Voltage	$V_{CC}$	3.15	3.3	3.45	V
Supply Current	$I_{CC}$	-	-	100	mA
Data Differential Output Voltage	$V_{out, pp}$	300	-	1000	mV
Data Output Rise Time (10%-90%)	$t_r$	-	-	0.35	ns
Data Output Fall Time (10%-90%)	$t_f$	-	-	0.35	ns
Receiver Optical Characteristics					
Parameter	Symbol	Min	Typ	Max	Unit
Maximum Receiver Power	$P_{in}$	-3	-	-	dBm
Receiver Sensitivity	$P_S$	-	-34	-	dBm
Optical Center Wavelength <b>NK3115-60ATO</b>	$\lambda_C$	1480	-	1600	nm
Optical Center Wavelength <b>NK5515-60ATO</b>	$\lambda_C$	1250	-	1350	nm
Signal Detect-Asserted	$P_A$	-	-	-34	dBm avg.
Signal Detect-Deasserted	$P_D$	-46	-	-	dBm avg.
Signal Detect-Hysteresis	$P_A - P_D$	0.5	-	-	dB

**BULGARIA**

Tel: +359 2 974 3030  
 Fax: +359 2 974 0303  
 info@networklogic.eu


**RUSSIA**

Tel: +7 495 984 7673  
 Fax: +7 495 984 7673  
 info@networklogic.ru

**TAIWAN**


Tel: +886 2 2656 0139  
 Fax: +886 2 2660 3864  
 info@networklogic.com.tw

## Recommended Circuit Schematic

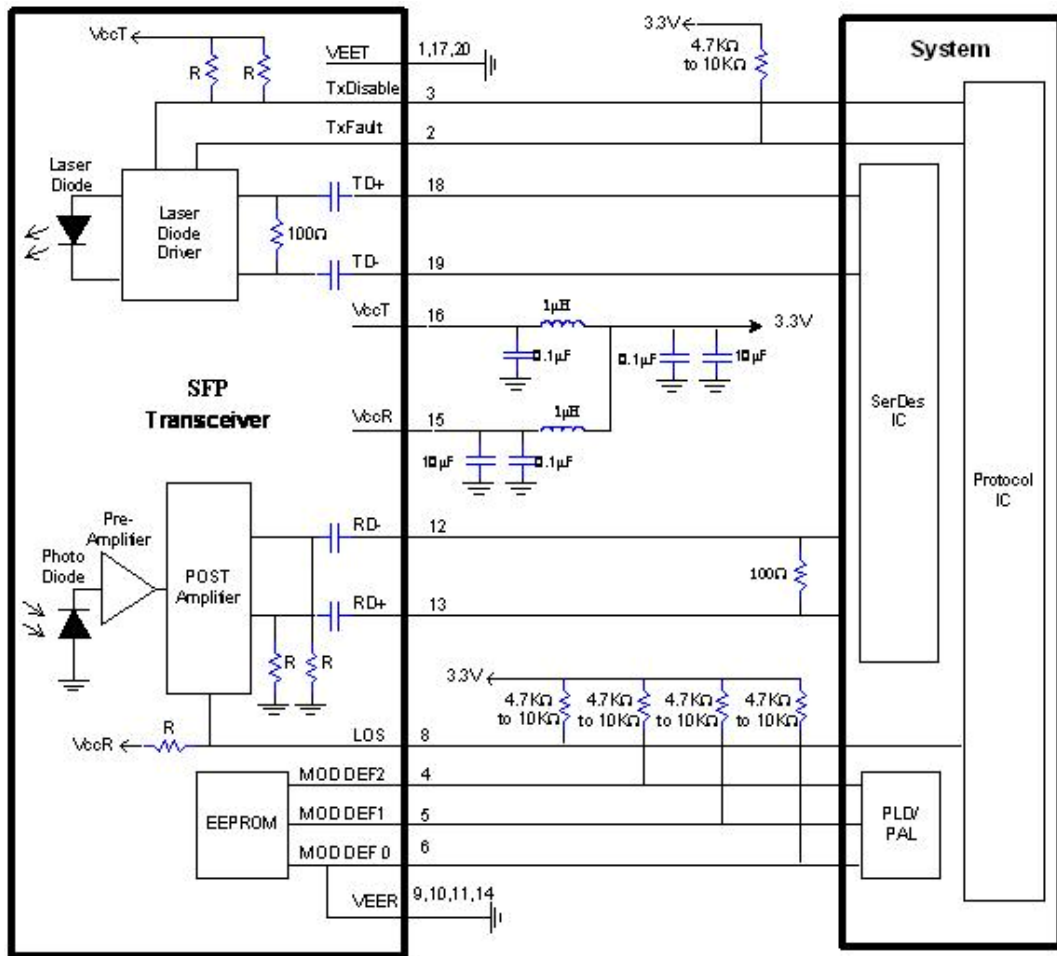

## Package Outline Drawing

Dimension (unit: mm)

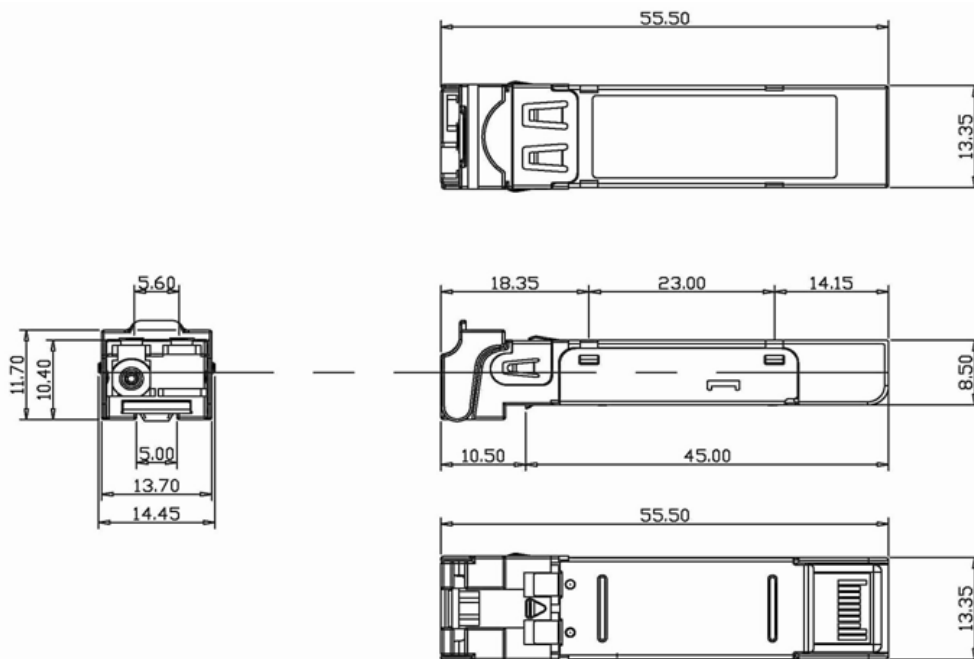

### BULGARIA

Tel: +359 2 974 3030  
Fax: +359 2 974 0303  
info@networklogic.eu


### RUSSIA

Tel: +7 495 984 7673  
Fax: +7 495 984 7673  
info@networklogic.ru

### TAIWAN

Tel: +886 2 2656 0139  
Fax: +886 2 2660 3864  
info@networklogic.com.tw

## SFP Transceiver Electrical Pad Layout

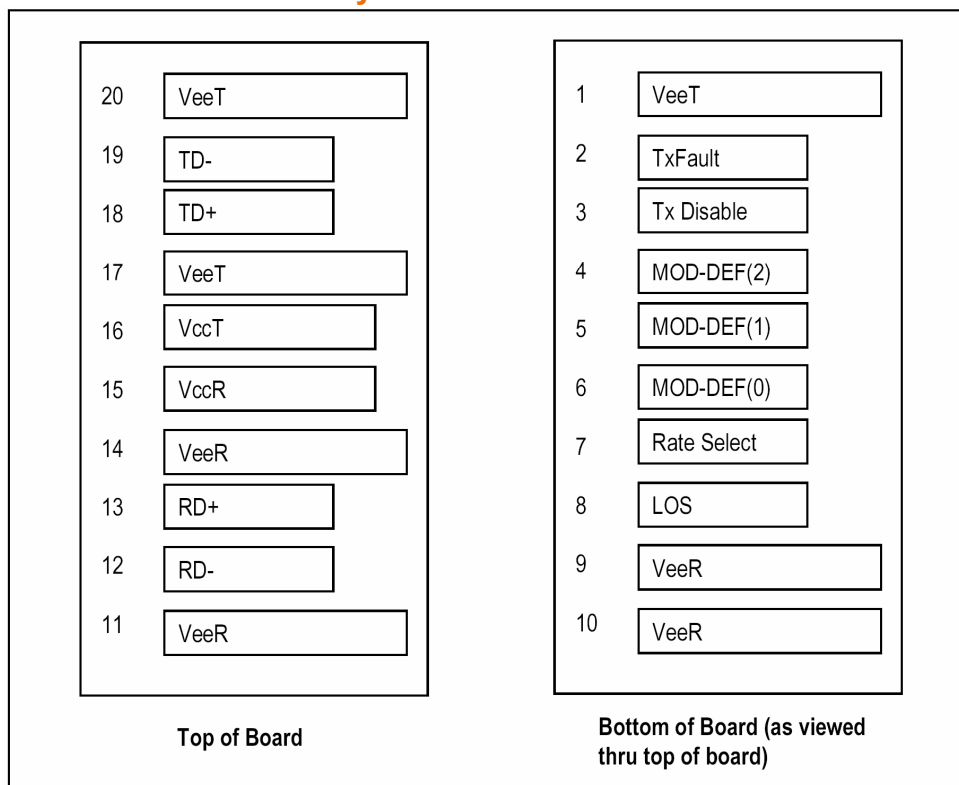

## Pinout Table

Pin	Symbol	Name/Description	Ref.
1	V <sub>EET</sub>	Transmitter Ground	1
2	T <sub>FAULT</sub>	Transmitter Fault.	4
3	T <sub>DIS</sub>	Transmitter Disable. Laser output disabled on high or open.	2
4	MOD_DEF (2)	Module Definition 2. Data line for Serial ID.	3
5	MOD_DEF (1)	Module Definition 1. Clock line for Serial ID.	3
6	MOD_DEF (0)	Module Definition 0. Grounded within the module.	3
7	Rate Select	No connection required	
8	LOS	Loss of Signal indication. Logic 0 indicates normal operation.	
9	V <sub>EER</sub>	Receiver Ground	1
10	V <sub>EER</sub>	Receiver Ground	1
11	V <sub>EER</sub>	Receiver Ground	1
12	RD-	Receiver Inverted DATA out. AC Coupled	
13	RD+	Receiver Non-inverted DATA out. AC Coupled	
14	V <sub>EER</sub>	Receiver Ground	1
15	V <sub>CCR</sub>	Receiver Power Supply	
16	V <sub>CCT</sub>	Transmitter Power Supply	
17	V <sub>EET</sub>	Transmitter Ground	1
18	TD+	Transmitter Non-Inverted DATA in. 100 ohm termination between TD+ and TD-, AC Coupled thereafter.	
19	TD-	Transmitter Inverted DATA in. See TD+	
20	V <sub>EET</sub>	Transmitter Ground	1

### Notes:

- Laser output disabled on TDIS >2.0V or open, enabled on TDIS <0.8V.
- Should be pulled up with 4.7k – 10kohms on host board to a voltage between 2.0V and 5.5V. MOD\_DEF (0) pulls line low to indicate module is plugged in.
- TX-Fault is open collector output. Should be pulled up with 4.7k – 10k ohms on host board to a voltage between 2.0V and 5.5V.
- LOS is open collector output. Should be pulled up with 4.7k – 10k ohms on host board to a voltage between 2.0V and 5.5V.

### BULGARIA

Tel: +359 2 974 3030  
 Fax: +359 2 974 0303  
 info@networklogic.eu

### RUSSIA

Tel: +7 495 984 7673  
 Fax: +7 495 984 7673  
 info@networklogic.ru

### TAIWAN

Tel: +886 2 2656 0139  
 Fax: +886 2 2660 3864  
 info@networklogic.com.tw