

Description

The SF-S24-D is small form factor pluggable module for bi-directional serial optical data communications such as SONET OC-3 / SDH STM-1 and Fast Ethernet. It is with the SFP 20-pin connector to allow hot plug capability. Digital diagnostic functions are available via an I2C. This module is designed for single mode fiber and operates at a nominal wavelength of 1550 nm. A guaranteed minimum optical link budget of 50 dB is offered which can correspond to a link distance of over 240 km (assuming worst case fiber loss of 0.2 dB/km). The transmitter section uses a 1550 nm multiple quantum well DFB laser and is a class 1 laser compliant according to International Safety Standard IEC-60825. The receiver section uses an integrated InGaAs detector preamplifier (IDP) mounted in an optical header and a limiting post-amplifier IC.



Laser Safety

This single mode transceiver is a Class 1 laser product. It complies with IEC-60825 and FDA 21 CFR 1040.10 and 1040.11. The transceiver must be operated within the specified temperature and voltage limits. The optical ports of the module shall be terminated with an optical connector or with a dust plug.

Features

- Small Form Factor Pluggable MSA Compliant
- Compliant with SONET OC-3 / SDH STM-1
- 50 dB Power Budget (up to 240 km)
- 1550 nm DFB LD Transmitter
- APD High Sensitivity Receiver
- SFF-8472 Digital Diagnostic Function
- EEPROM with serial ID functionality
- LC Duplex Connector
- Class 1 Laser Safety Standard IEC 825 Compliant
- Single + 3.3 V power Supply
- Temperature Ranges: 0 to +70°C
- RoHS Compliant

Applications

- Fast Ethernet Links
- SONET/SDH Equipment Interconnect
- Bridges/Routers/intelligent hub and concentrators

Absolute Maximum Ratings

Parameter	Symbol	Min	Typ	Max	Unit
Storage Temperature	T _S	-40	-	85	°C
Operating Temperature	T _{OP}	0	-	70	°C
Power Supply Voltage	V _{CC}	-0.5	-	3.6	V
Power Supply Current	I _{CC}	-	200	300	mA

General Specifications

Parameter	Symbol	Min	Typ	Max	Units
Data Rate	B	-	125/155	-	Mbps
Supported Link Length on 9/125μm SMF	L	-	240	-	Km

Order Information

Models	Bit Rate (Mbps)	Distance (km)	Wavelength (nm)	Fiber Single/Dual	Package	Temp. (°C)	TX Power (dBm)	RX Sens. (dBm)
SF-S24-D	125 / 155	240	1550 DFB	Dual	LC SFP w DMI	0 to 70	8 to 5	-45

BULGARIA

| Network Logic Ltd.
| Tel: +359 2 974 3030

RUSSIA

| Network Logic Ltd.
| Tel: +7 495 984 7673

TAIWAN

| Network Logic Technologies Co. Ltd.
| Tel: +886 2 2656 0139

Transmitter Specifications ($0^{\circ}\text{C} < \text{Topr} < 70^{\circ}\text{C}$, $3.135\text{V} < \text{Vcc} < 3.465\text{V}$)

Parameter	Symbol	Min	Typ	Max	Units	Notes
Optical						
Optical Transmit Power	P _o	5	---	8	dBm	1
Output Center Wavelength	λ	1480		1580	nm	
Output Spectrum Width	Δλ	---	---	1	nm	-20 dB Width
Side Mode Suppression Ratio	SMSR	30			dB	
Extinction Ratio	E _R	10	---	---	dB	
Output Eye	Compliant with Bellcore TR-NWT-000253 and ITU recommendation G.957					
Optical Rise Time	t _r			2	ns	10 % to 90% Values
Optical Fall Time	t _f			2	ns	10 % to 90% Values
Relative Intensity Noise	RIN			-120	dB/Hz	
Electrical						
Data Input Current - Low	I _{IL}	-350			μA	
Data Input Current - High	I _{IH}			350	μA	
Differential Input Voltage	V _{IH} - V _{IL}	0.5		2.4	V	Peak-to-Peak
TX Disable Input Voltage - Low	T _{DIS_L}	0		0.5	V	2
TX Disable Input Voltage - High	T _{DIS_H}	2.0		Vcc	V	2
TX Disable Assert Time	T _{ASSERT}			10	μs	
TX Disable Deassert Time	T _{DEASSERT}			1	ms	
TX Fault Output Voltage -- Low	T _{FaultL}	0		0.8	V	3
TX Fault Output Voltage -- High	T _{FaultH}	2.0		Vcc+0.3	V	3

1. Output power is power coupled into a 9/125 μm single mode fiber.

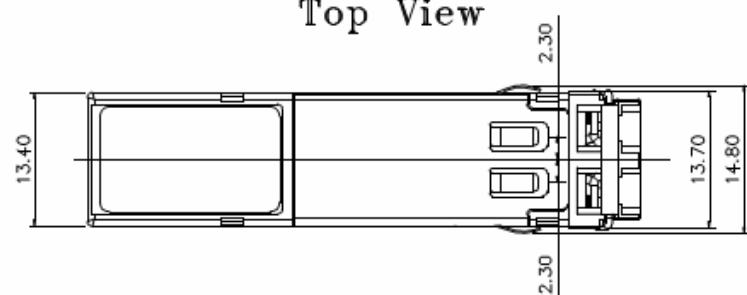
2. There is an internal 4.7K to 10K ohm pull-up resistor to VccTX.

3. Open collector compatible, 4.7K to 10K ohm pull-up to Vcc (Host Supply Voltage).

Receiver Specifications ($0^{\circ}\text{C} < \text{Topr} < 70^{\circ}\text{C}$, $3.135\text{V} < \text{Vcc} < 3.465\text{V}$)

Parameter	Symbol	Min	Typ	Max	Units	Notes
Optical						
Sensitivity	Sens			-45	dBm	4
Maximum Input Power	P _{in}	-10			dBm	4
Signal Detect -- Asserted	P _a	---		-45	dBm	Transition: low to high
Signal Detect -- Deasserted	P _d	-55	---	---	dBm	Transition: high to low
Signal detect -- Hysteresis		1.0	---		dB	
Wavelength of Operation		1200	---	1600	nm	
Electrical						
Differential Output Voltage	V _{OH} - V _{OL}	0.6		2.0	V	
Output LOS Voltage -- Low	V _{OL}	0		0.8	V	5
Output LOS Voltage -- High	V _{OH}	2.0		Vcc+0.3	V	5

4. Measured at $2^{23}-1$ PRBS at BER 1E-10.

Top View

Front View
